



Vustr

ENGINEERED DISPLAYS

Vustr

ENGINEERED DISPLAYS

Vustr displays offered by Techworks are durable for extended use in out-of-home environments like stores, shopping malls, offices and even outdoors!



Available in variable sizes to fit your requirements.

Easily manage all Engineered Displays from any location using our online CMS.




Thin bezel & high range of brightness and contrast

Easy landscape and portrait format usage.




Vustr

ENGINEERED DISPLAYS

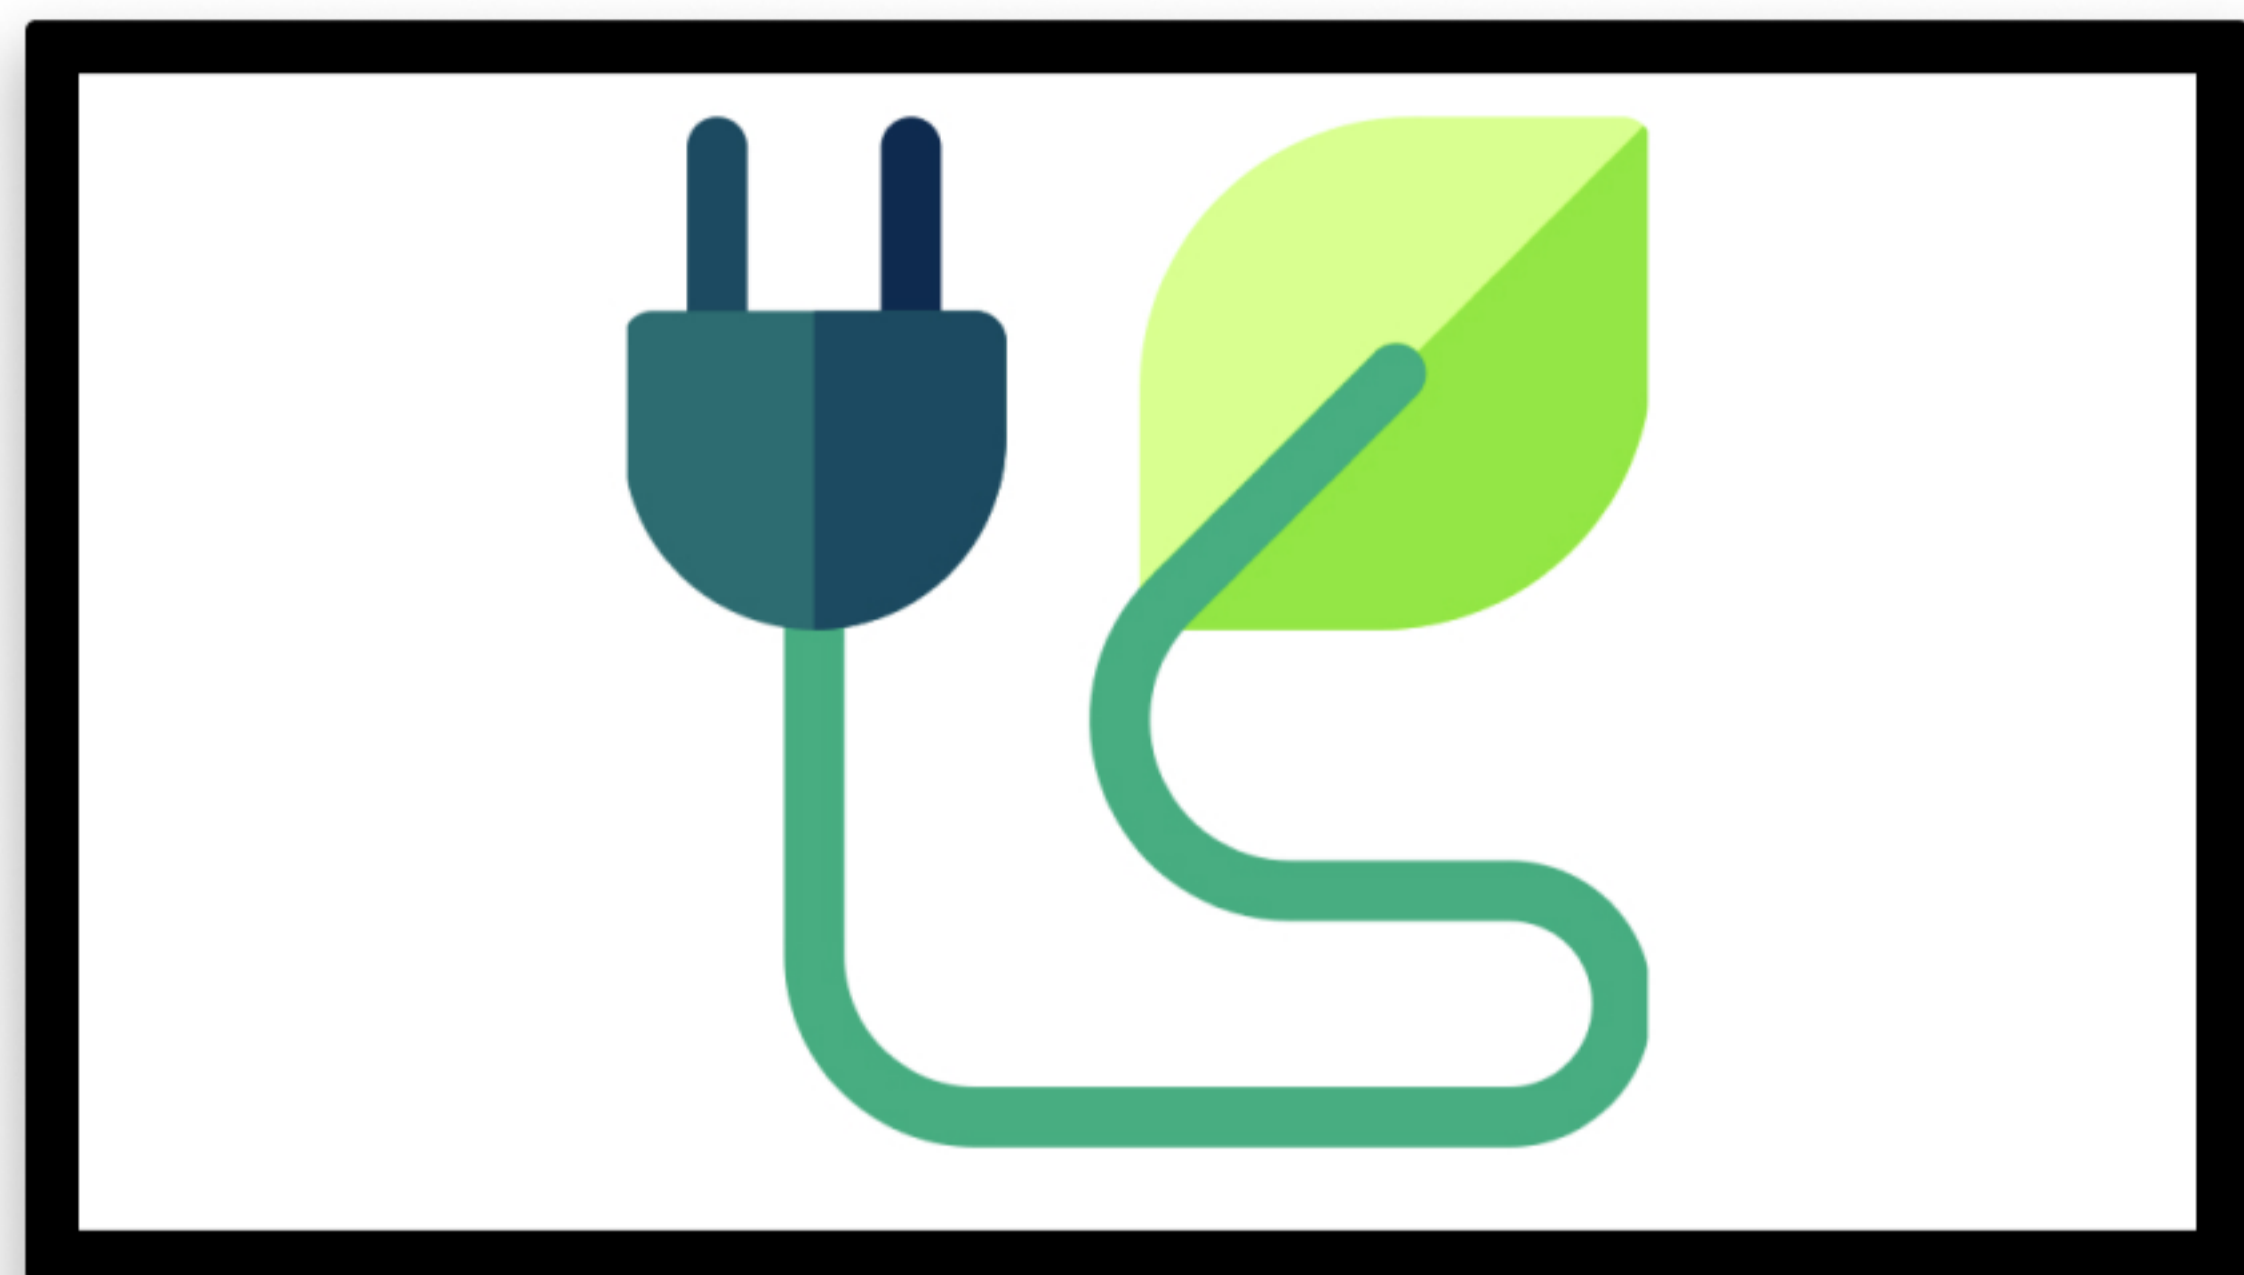

Low Power Consumption.

Retrofit Touch Interactive Capability.

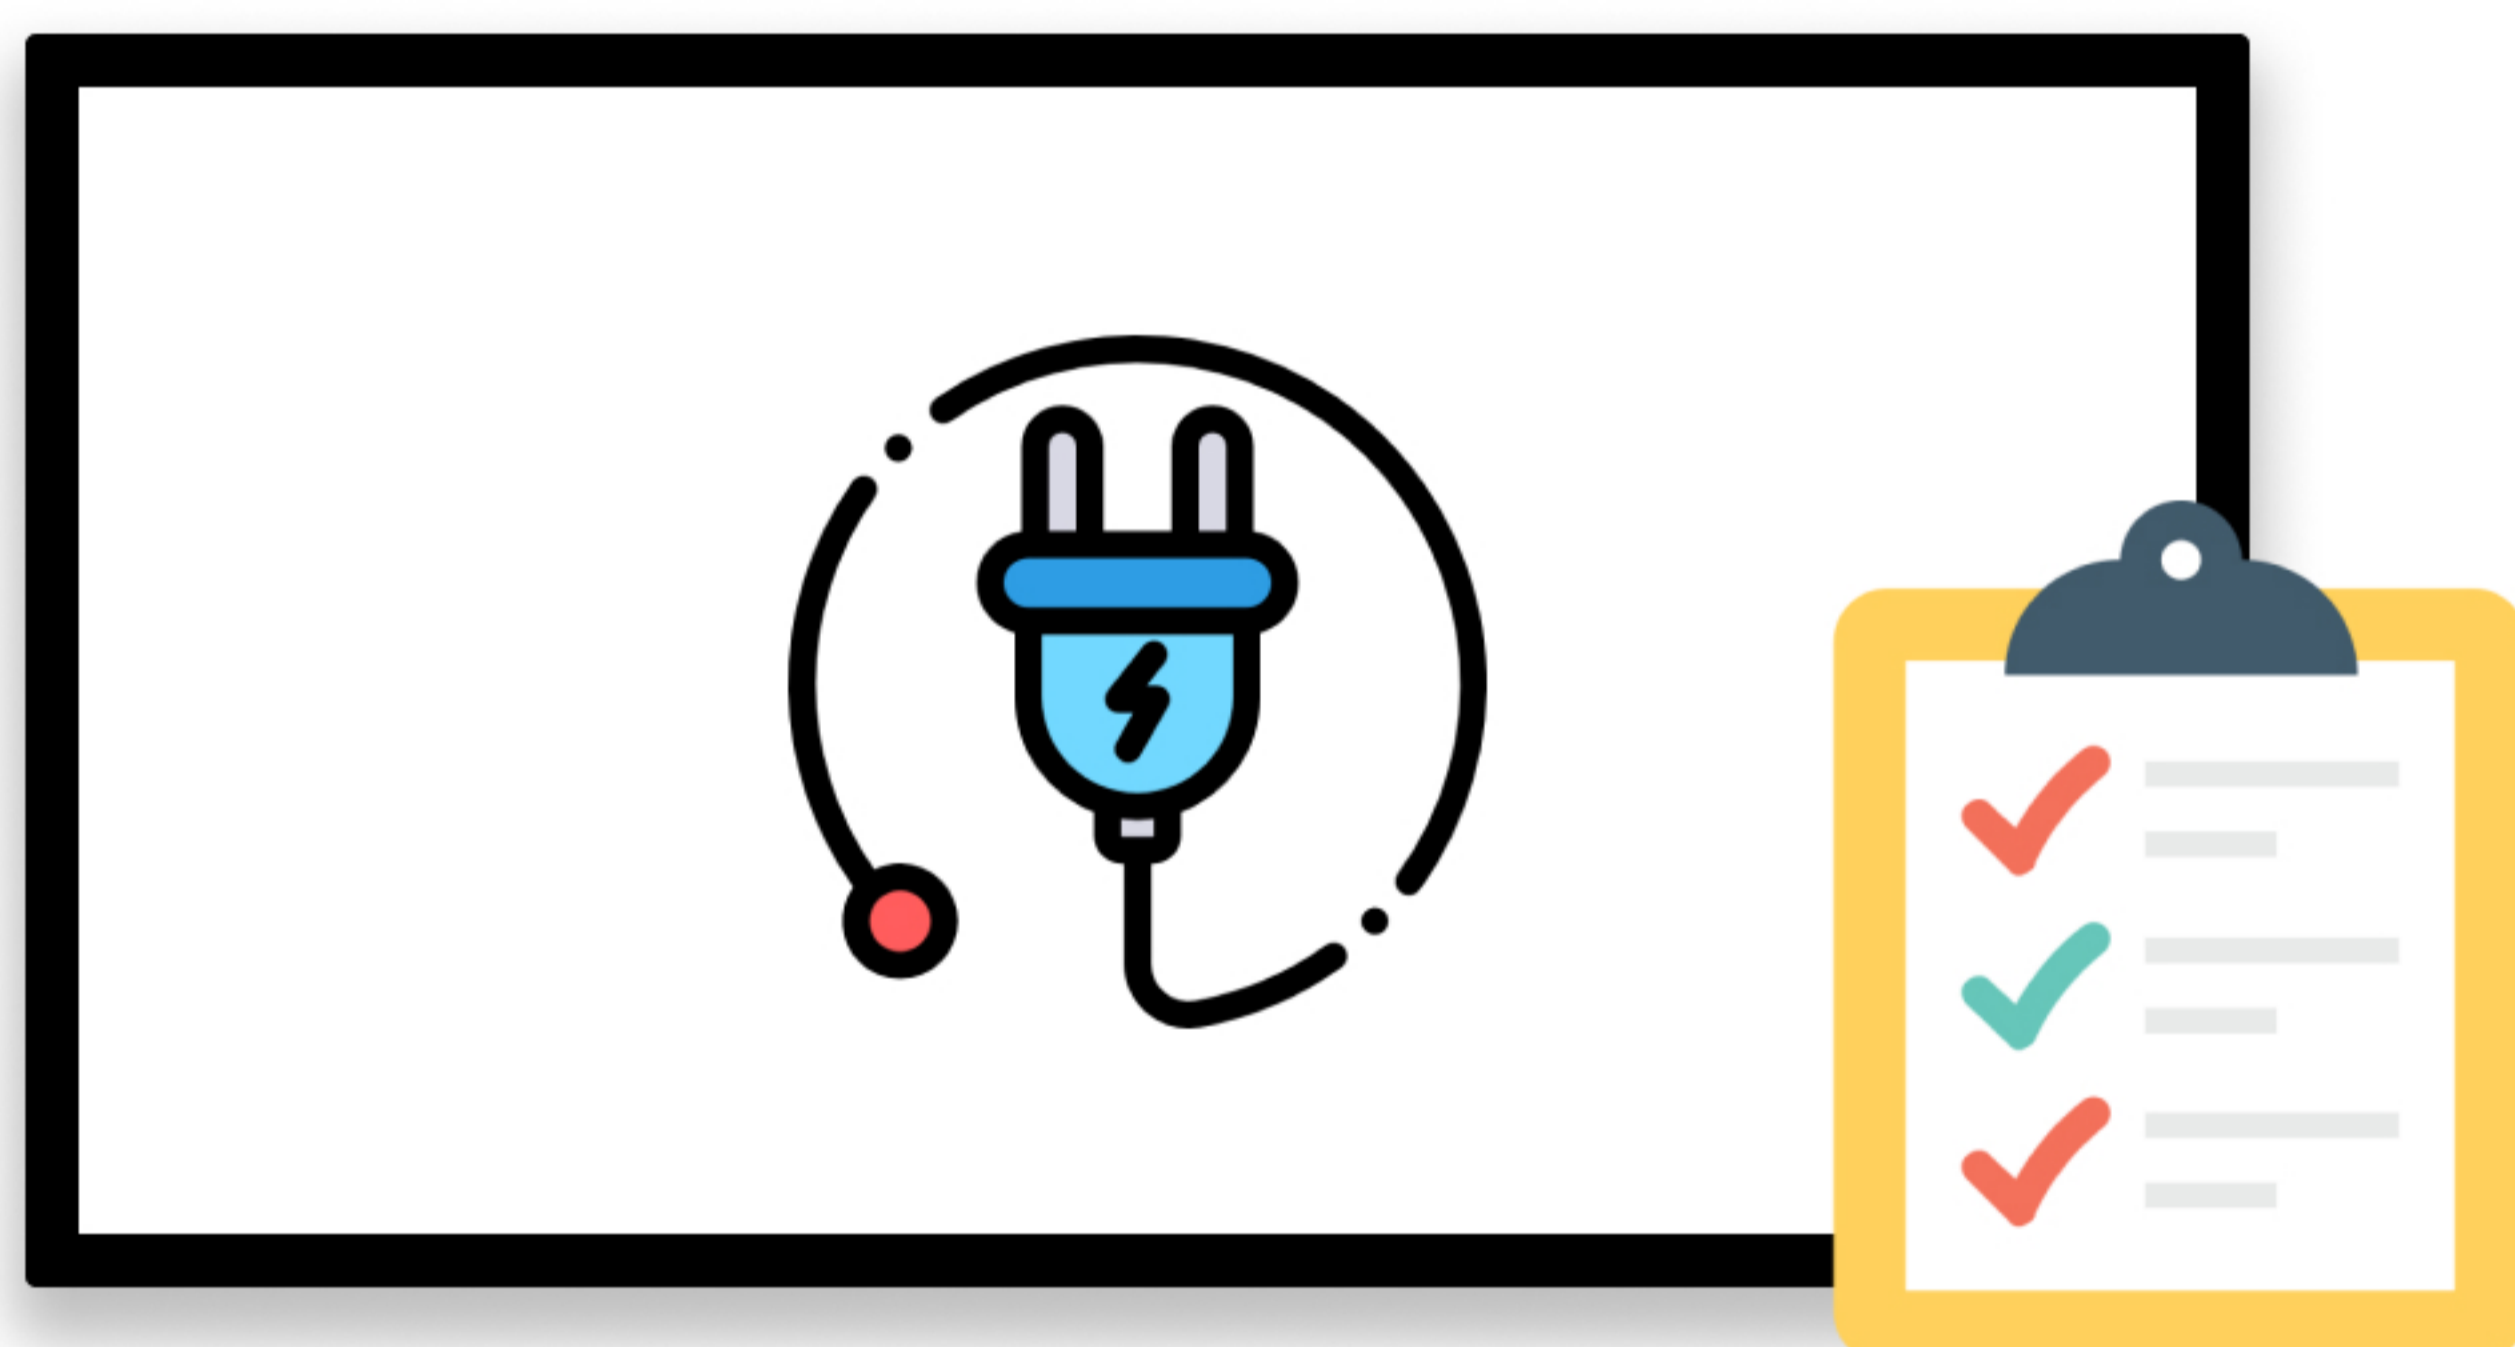

Comply with all Indian power standards.

Range of enclosure from standard, to vandal proof, to weather proof IP54-IP65.



With the help of our professional mounting and pre-sales team, we deliver clean and perfect installations. Our range of products are designed to allow our customers to explore a whole world of creative possibilities.



Model Name		Vustr 32SM	Vustr 40SM	Vustr 50SM	Vustr 55SM	Vustr 75SM	Vustr 86SM
LCD Panel	Screen Size	32"	40"	50"	55"	75"	86"
	Resolution	1366 x 768	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160
	Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
	Brightness	270 cd/m ²	300 cd/m ²	390 nits	440 nits	450 nits	500cd/m ²
	Contrast Ratio	1200:1	1200:1	1200:1	1200:1	1200:1	1200:1
	Viewing Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
	Backlight Life in Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	30,000 Hrs
	Refresh Rate in Hz	(Min.) 50/60	(Min.) 50/60	(Min.) 50/60	(Min.) 50/60	(Min.) 50/60	(Min.) 50/60
I/O Interfaces	DP 1.2 in	NA	NA	NA	NA	NA	2
	DP out	NA	NA	NA	NA	NA	1
	HDMI 1.4	2	2	NA	NA	NA	2
	HDMI 2.0	NA	NA	3	3	3	2
	RS232/RJ45	LAN-RJ45	LAN-RJ45	LAN-RJ45	LAN-RJ45	LAN-RJ45	IN-1/OUT-1
Sound	Built-in Speakers	12Wx2(8Ω)	10Wx2(8Ω)	8Wx2(8Ω)	8Wx2(8Ω)	8Wx2(8Ω)	15Wx2(6Ω)
Power	Input Power	AC 90V to AC 264V	AC 90V to AC 264V	AC 100V to AC 240V	AC 100V to AC 240V	AC 100V to AC 240V	AC 100V to AC 240V
	Power Consumption (Typ.)	50W	65W	138W	138W	200W	550W
	Power Consumption (Standby)	≤ 0.5W	≤ 0.5W	≤ 0.5W	≤ 0.5W	≤ 0.5W	≤ 0.5W
Environmental Conditions	Operating Temperature	5°C~55°C	5°C~55°C	0°C~40°C	0°C~40°C	0°C~40°C	0°C~40°C
	Operating Humid.	25%~75% RH	25%~75% RH	10%~80%	10%~80%	10%~80%	10%~80%
Physical Specification	Bezel	Narrow	Narrow	Bezel less	Bezel less	Narrow Bezel	US(T/B/L/R) 12.8mm
	Back cover	Plastic	Plastic	Metal	Metal	Metal	PC+ABS V0
	Wall hanging size(mm)	100x100	200x100	200x100	200x100	200x100	800x400
	Wall hanging screws(mm)	-	-	CSK4*50 mm	CSK4*50 mm	CSK4*50 mm	M8*20
	Net Weight	3.8kg	8.5kg	15.2kg	19kg	19.4kg	68Kg
	VESA Mounting	Yes	Yes	Yes	Yes	Yes	Yes
Gross Weight	5.7kg	9.2kg	23.2kg	28.4kg	30.2kg	91kg	

*specifications are subject to change.





For More Information



contact@techworksworld.com



techworksworld.com